

DUAL HINGED DOOR




STANDARD FEATURES

The Accelelevation Dual Hinged Containment Door is the most dependable door type available. An elegant design allows an incredible level of function in such a simple package. With key standard features and a wide range of available options you can be sure that you will get exactly what you need for your hot or cold containment system.

- Custom Sized (to 1/8")
- Rigid Design
- No Threshold
- Soft-Closing
- Modular Design
- Clear or Black Anodized Finish




Auto-Closing



Hold-Open



Customizable

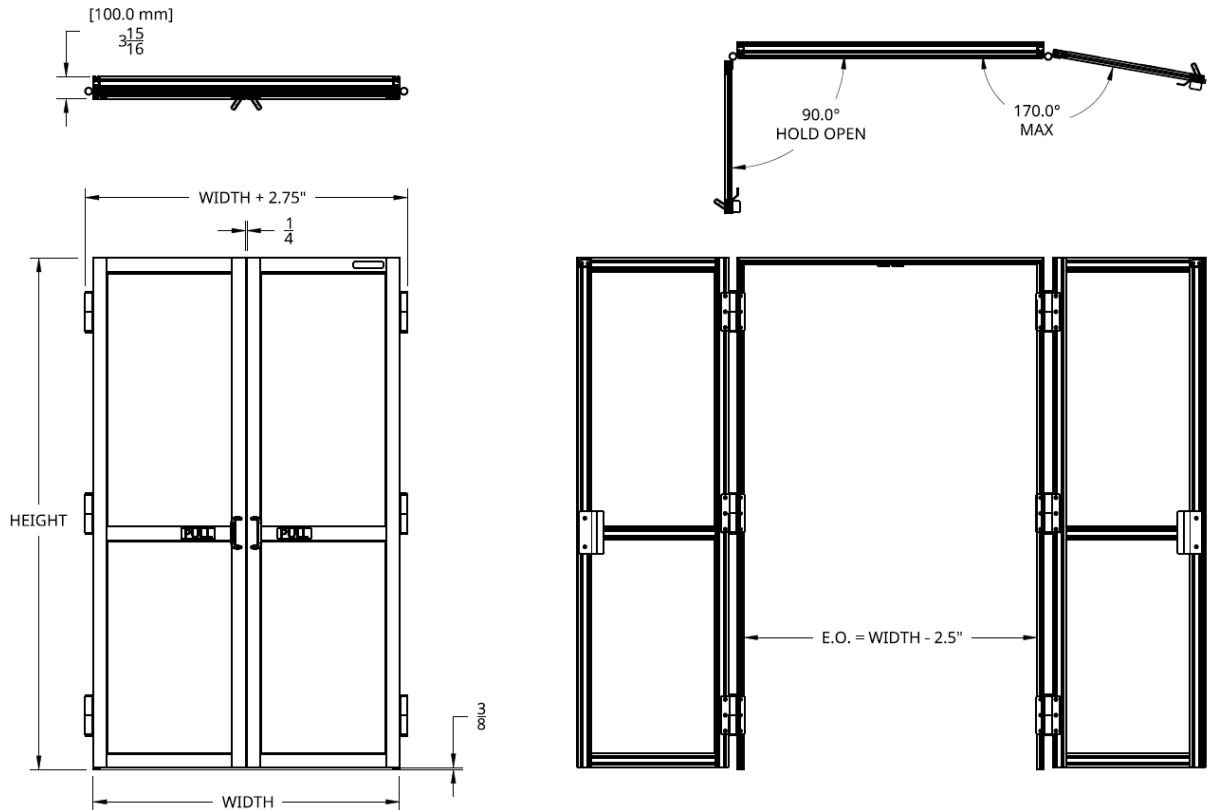

DUAL HINGED DOOR – PRODUCT SPECIFICATIONS

FRAMEWORK

Aluminum Extrusion	Tensile Strength	27,000 PSI
--------------------	------------------	------------

INSERTS

Varies	Flame Rating	Varies by chosen insert option. <i>(See examples below.)</i>
8mm Twinwall Polycarbonate	Flame Rating	ASTM E84 Class A
4mm Clear Polycarbonate	Flame Rating	UL 94 HB

*Additional Insert Options Available

CUSTOMIZABLE OPTIONS

- Insert Material Options*
- Powder-Coated Finish
- Magnetic Latch Standard
- Max Frame Size: 80" W x 108" H