

ELEVATE DUAL SLIDING DOOR



STANDARD FEATURES

The Elevate Dual Sliding Containment Door is our smoothest, most versatile design yet, built to your exact specifications with unparalleled construction and dependability. The bi-part opening doors are available in multiple custom heights and widths. Key standard features ensure that you will get exactly what you need for your hot or cold containment system.

- Dual Sliding
- Bi-part Door Opening
- Smooth Actuation
- Soft, Secure Auto Closing
- No Threshold
- Rigid Design
- Clear, Shatter-resistant Panels
- Custom Sizes
- Top Quality Construction
- Durable, Low Maintenance



Auto-Closing




No Threshold



Top Quality

Customizable
Sizes

Hold-Open

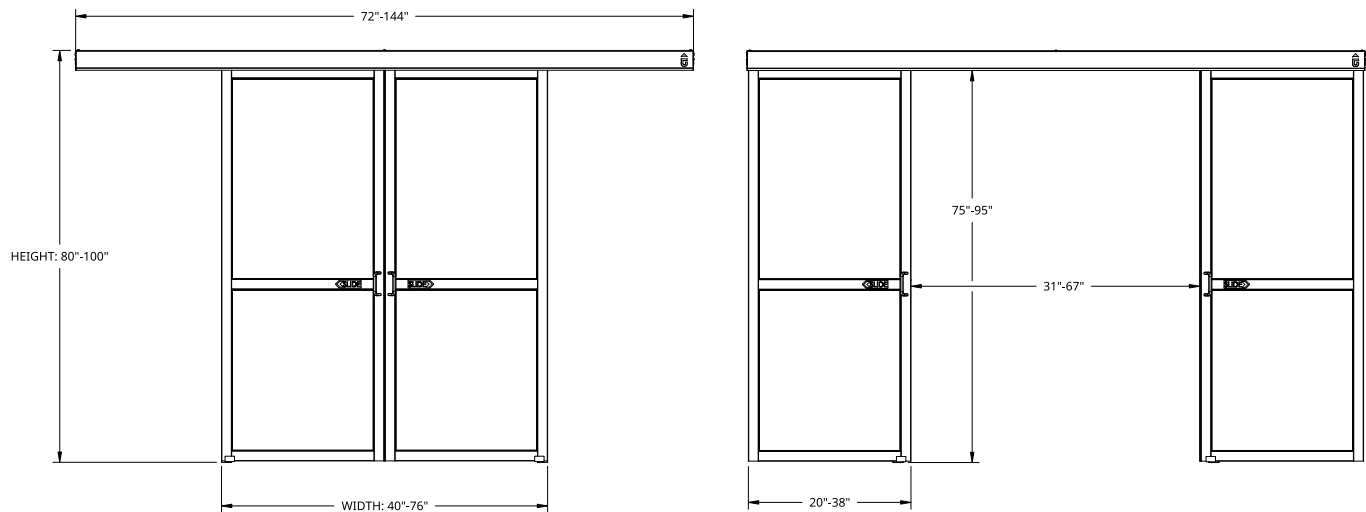

ELEVATE DUAL SLIDING DOOR – PRODUCT SPECIFICATIONS

DUAL SLIDING DOOR

Frame Width	40-76"
Overall Height Options	80"-100"
Effective Opening (height)	75.375"-95.375"
Effective Opening (width)	31.375"-67.375"

INSERTS

8mm Twinwall Polycarbonate	Flame Rating	ASTM E84 Class A
3mm Clear Solid Polycarbonate	Flame Rating	ASTM E84 Class A

*Adjustable in 1" increments

FEATURES

Auto-closer	No Threshold
Soft Close	Floor Supported
Hold Open	Bi-Parting Opening

OPTIONS

Matching Sidelight Panels
Custom Logo/Branding
Black, Silver or Custom Powdercoat Finish