ELEVATE SINGLE SLIDING DOOR

accelevation



STANDARD FEATURES

The Elevate Single Sliding Containment Door is our smoothest, most versatile design yet, built to your exact specifications with unparalleled construction and dependability. The Sliding door is available in multiple custom heights and widths, with left or right hand opening. Key standard features ensure that you will get exactly what you need for your hot or cold containment system.





No Threshold



Top Quality









Hold-Open

- Single Sliding
- **Smooth Actuation**
- Soft, Secure Auto Closing
- No Threshold
- Rigid Design
- Clear, Shatter-resistant Panels
- Left or Right Hand Configurations
- **Custom Sizes**
- Top Quality Construction
- Durable, Low Maintenance

accelevation

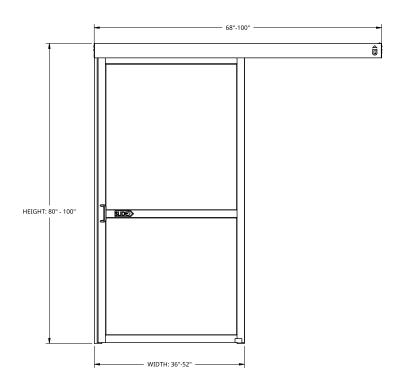



ELEVATE SINGLE SLIDING DOOR – PRODUCT SPECIFICATIONS

SINGLE SLIDING DOOR		
Frame Width	36"-52"*	
Overall Height Options	80"-100"*	
Effective Opening (height)	75.375"-95.375"	
Effective Opening (width)	29"-45"*	

INSERTS		
8mm Twinwall Polycarbonate	Flame Rating	ASTM E84 Class A
3mm Clear Solid Polycarbonate	Flame Rating	ASTM E84 Class A

^{*}Adjustable in 1" increments

FEATURES	
Auto-closer	No Threshold
Soft Close	Floor Supported
Hold Open	Left/Right Configurations

OPTIONS
Matching Sidelight Panels
Custom Logo/Branding
Black, Silver or Custom Powdercoat Finish